




D.C. ELECTROSTATIC GENERATORS



Electrostatic Generator - mod. GE-100-1

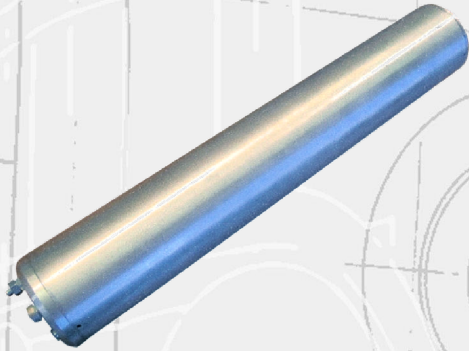

The **Electrostatic Generator mod. GE/100/1** represents a new technological concept, and allows excellent flocking quality as well as a higher degree of safety during the working process. It consists of two separate units:

- **Electrostatic generator** equipped with an "anti-stalactite" device: in case flock stalactites cause excessive absorption, the generator disconnects itself for a split second, causing the stalactite to fall. This operation is fully automatic and the absorption value after which the unit starts working again can be adjusted.

- **Control panel** allows all necessary adjustments through the following controls:

- low and high tension led signal
- tension adjustment and relative display
- current adjustment and relative display
- alarm

The machine's main features are:

- Highly reliable electronics
- Stabilized supplied tension, which remains constant independently from flocking machine operating conditions
- Adjustable amperage

TECHNICAL DATA

Dimensions	222 x 245 x 57 mm
Power supply / Maximum output power	230 V/50-60 Hz / 80 Watt
Current adjustable output	0÷1 mA Max
Voltage output	100 KV
Voltage adjustable output	0÷50 KV
Current signal accuracy / Voltage signal accuracy	1% / 2%

Member of CISQ Federation



AIGLE