


COATING LINE



BLANKET COATING HEAD – MOD. BSR-T (blade coating system with blanket)




The Coating Head mod. BSR-T has been designed and built so that different coating techniques can be employed.

Machine is suitable for:

- Full cover coating over blanket
- Full cover coating by floating blade

The following are some of the advantages that this machine has to offer:

- Easy implementation: the coating head can be placed at the inlet of a common stenter
- Maximum control over compound quantity; process reproducibility is guaranteed
- Great flexibility in choosing compounds and textile supports, the variety of which is continuously growing
- Great accuracy in the tensioning of textile support passing through the machine.

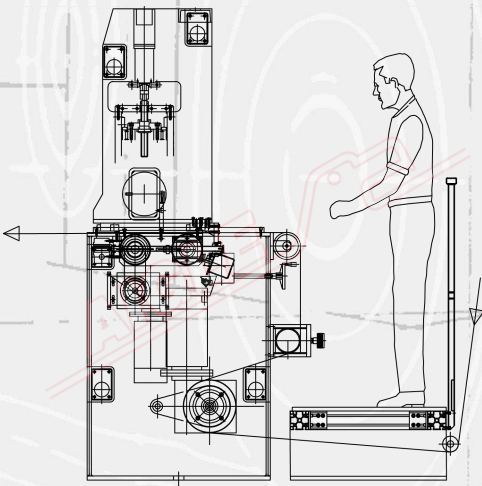

The unit can be used both for air-coating and coating on blanket. The unit is equipped with a motorized device to adjust the coating thickness, through digital displays.

TECHNICAL DATA

Useful width	to be defined
Power supply	400 V/50 Hz/three-phase
Installed power	1,5 kW
Compressed air	7±1 Kg/cm ²

Member of CISQ Federation



AIGLE