



COATING LINE



Coating Head - mod. BS

The **Coating Head mod. BS** has been designed and built to coat using machinery that can be easily implemented.

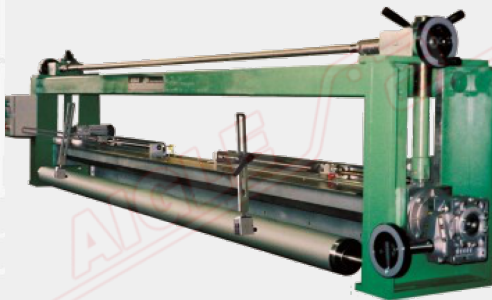

The following are some of the advantages that come with this machine:

- The machine can be placed at the inlet of a common stenter, occupying minimum space
- Maximum control over the quantity of the compound being used
- Great flexibility when choosing the compounds and textile supports, the variety of which is continuously growing.


The coating head is used for air-coating, and is equipped with a coating blade and blade support.

The support provides a system to change the coating blade inclination using a goniometric reference.

The motion of the coating blade is made possible through manually adjustable handwheels with mechanical reducers.

TECHNICAL DATA

Useful width	to be defined
Power supply	400V/50Hz/three-phase
Installed power	<1 kW

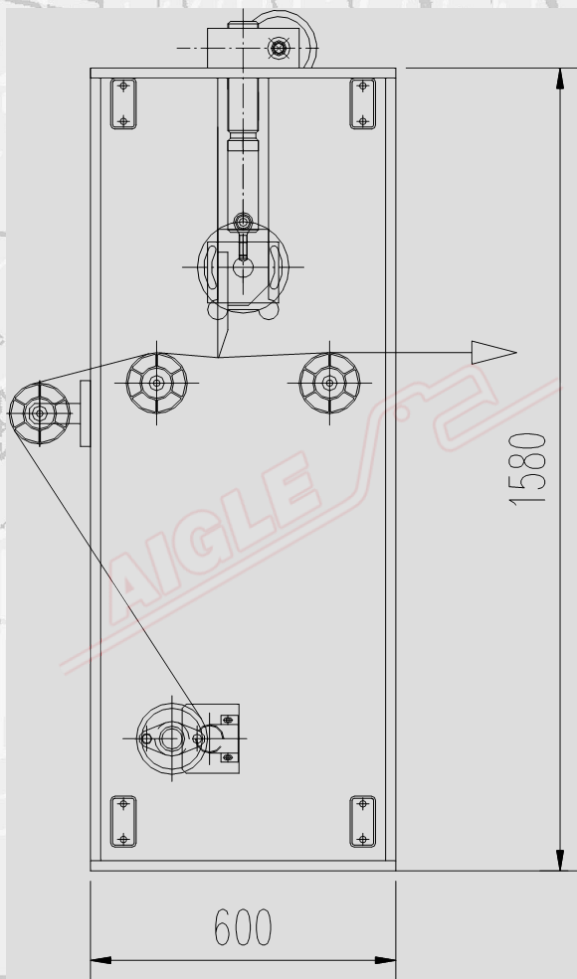

Member of CISQ Federation



AIGLE 