
COATING LINE




Coating Head - mod. BS2/M

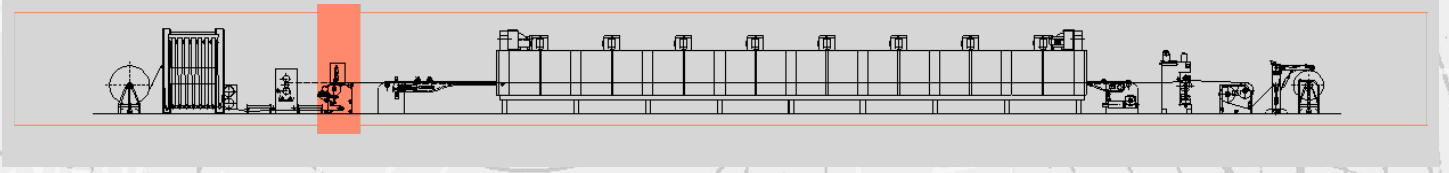

The **Coating Head mod. BS2/M** has been designed and built so that different coating techniques can be employed.


The following are some of the advantages the machine has to offer:

- Easy implementation: the coating head can be placed at the inlet of a common stenter
- Maximum control over compound quantity; process reproducibility is guaranteed
- Great flexibility in choosing compounds and textile supports, the variety of which is continuously growing
- Great accuracy in the tensioning of textile support passing through the machine.

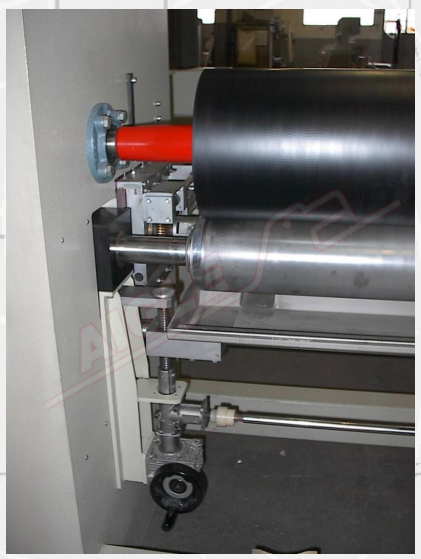

The unit can be used both for air-coating, coating on cylinder, and coating by photoengraved cylinder; it is also equipped with a motorized device to adjust the coating thickness through digital displays.

The machine is also equipped with a rotary screen coating head. Such coating systems allow for maximum control over the compound penetration.

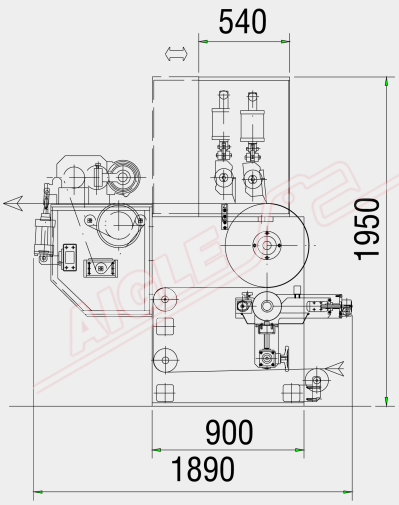

TECHNICAL DATA	
Useful width	to be defined
Power supply	400 V/50 Hz/three-phase
Compressed air	7±1 Kg/cm²

Member of CISQ Federation
RINA
CERTIFIED MANAGEMENT SYSTEM
ISO 9001 - ISO 14001

GREEN LABEL
SUSTAINABLE MACHINERY CERTIFICATION

AIGLE

AIGLE Macchine srl • Via Donatello, 8 • 10071 Borgaro Torinese • ITALIA • Tel. +39 0112624382 • www.aigle.it • e-mail: info@aigle.it