


# COATING LINE




## Coating Machine - mod. BSR/F

The **Coating Machine mod. BSR/F** is used to coat fabric (with resin and/or adhesives).

The machine's features are:

- Easy implementation: the coating machine can be placed at the inlet of a common stenter
- Maximum control over compound quantity; process reproducibility is guaranteed
- Great flexibility in choosing compounds and textile supports, the variety of which is continuously growing
- Great accuracy in the tensioning of textile support passing through the machine.

The unit can be used for both air-coating and coating on cylinder and it is equipped with a motorized device to adjust coating thickness through digital displays, and to lift the blade when the seam passes through.

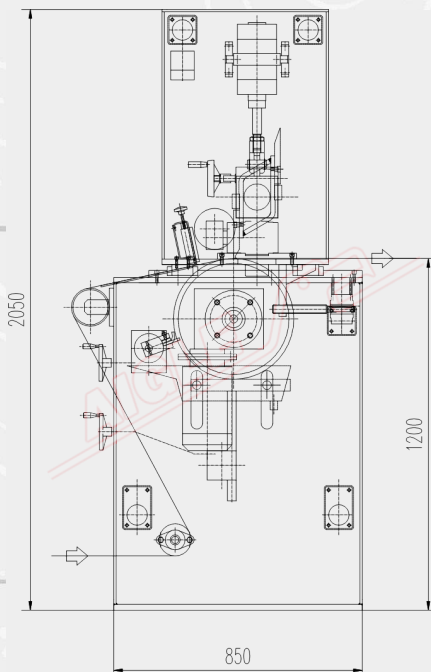

### TECHNICAL DATA

Useful width	to be defined
Power supply	400 V/50 Hz/three-phase
Installed power	3 kW
Compressed air	7±1 Kg/cm <sup>2</sup>

Member of CISQ Federation



# AIGLE