


D.C. ELECTROSTATIC GENERATORS



Electrostatic Generator - mod. GE-100-1-EASY



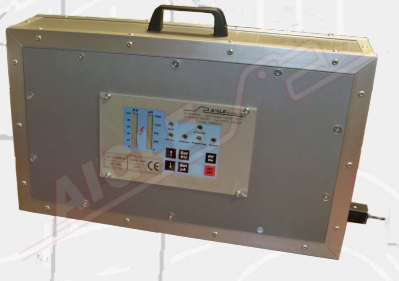

The **Electrostatic Generator mod. GE-100-1-EASY** represents a new technological concept and allows excellent flocking quality as well as a higher degree of safety during the working process. It consists of:

- **Electrostatic generator** and this is equipped with an "anti-stalactite" device: in case flock stalactites cause excessive absorption, the generator disconnects itself for a split second, causing the stalactite to fall. This operation is fully automatic and the absorption value after which the unit starts working again can be adjusted.
- **Integrated control panel** allows all the necessary adjustments to be made hrough the following controls:
- Low and high tension led signal
- Tension adjustment and relative display
- Current adjustment and relative display
- Alarm

The machine's main features are:

- Highly reliable electronics
- Stabilized supplied tension, which remains constant independently from flocking machine operating conditions
- Adjustable amperage

The generator can be connected to a flocking gun mod. Easy Flock, as in the photo.

TECHNICAL DATA	
Dimensions	222 x 245 x 57 mm
Power supply / Maximum output power	230 V/50-60 Hz / 80 Watt
Current adjustable output	0÷1 mA
Max Voltage output	100 KV
Voltage adjustable output	0÷50 KV
Current signal accuracy	1%
Voltage signal accuracy	2%

Member of CISQ Federation
RINA
CERTIFIED MANAGEMENT SYSTEM
ISO 9001 - ISO 14001

GREEN LABEL
SUSTAINABLE MACHINERY CERTIFICATION

AIGLE

AIGLE Macchine srl • Via Donatello, 8 • 10071 Borgaro Torinese • ITALIA • Tel. +39 0112624382 • www.aigle.it • e-mail: info@aigle.it